




**VENTILATION**  
**NONHAZARDOUS LOCATION**

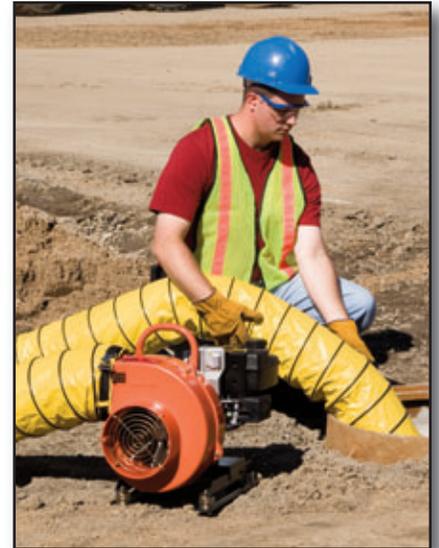

## GP8 RADIAL BLOWER

Designed to accommodate most nonhazardous confined space ventilation requirements where the use of a gasoline engine is desirable or required. Heavy duty, cast aluminum blower housing for exceptional resistance to damage. Convenient carry handle while on the jobsite. Cast impeller-type blower wheel delivers higher flow rates at increased static pressures. Spring mounted frame assembly reduces engine vibrations. Air flow rates are certified by an independent laboratory. Utilizes nonhazardous location-type ducts in 15 and 25 foot (4.6 and 7.4 m) lengths. Less ventilation duct.

### FEATURES

- Cast aluminum construction
- Rugged spring mounted frame
- Adjustable speed control
- Heavy-duty protective screens

### SPECIFICATIONS

<b>Operating Environment</b>	Nonhazardous type locations
<b>Engine</b>	3.5 HP (2.4kw), Briggs and Stratton Model 91232, RPM: 3600, speed control: manual.
<b>Nominal Diameter</b>	8 inch (203 mm)
<b>Housing Construction</b>	Cast aluminum
<b>Fan Construction</b>	Cast aluminum
<b>Mounting Type</b>	Spring anti-vibration
<b>Dimensions</b>	Height: 20-1/2 inch (521 mm) Length: 18 inch (457 mm) Width: 16-1/4 inch (413 mm)
<b>Weight</b>	56 lbs (25 kg)

### AIR FLOW RATES


CONFIGURATION	ACFM 15 FT DUCT
Free Air	1561.6 CFM (44.2 CMM)
One 90° Bend	1178.1 CFM (33.3 CMM)
Two 90° Bend	1066.2 CFM (30.2 CMM)

*Flow rates calibrated by Colorado Engineering Experiment Station, Inc. (CEESI). Tested in a chamber built in accordance to AMCA Standard 210-85. Flow rates are nominal and subject to variances due to normal manufacturing tolerances. Compare testing procedure before comparing performance of competitive products. Published flow rates are to serve as a reference only. Contact the factory for a detailed test report. Blowers are designed for portable air ventilation purposes only and not intended for transporting liquid, semi-solid or solid material. Unless properly marked with an agency listing, no General ventilation blower is designed to be operated in an explosive atmosphere, nor are they to be used to transport such an atmosphere.*

*All specifications are general in nature and are not intended for specific application purposes. General Equipment Company reserves the right to make changes in design, engineering, or specifications and to add improvements or discontinue manufacture at any time without notice or obligation. Consult applicable Operator Manual before utilizing. Refer to OSHA 2207 and/or current revisions for specific safety information. Names depicted are the registered trademarks of their respective owners.*

Form: GEF01111004

# 10 good reasons why your next gasoline powered air ventilation blower should be a General Model GP8.

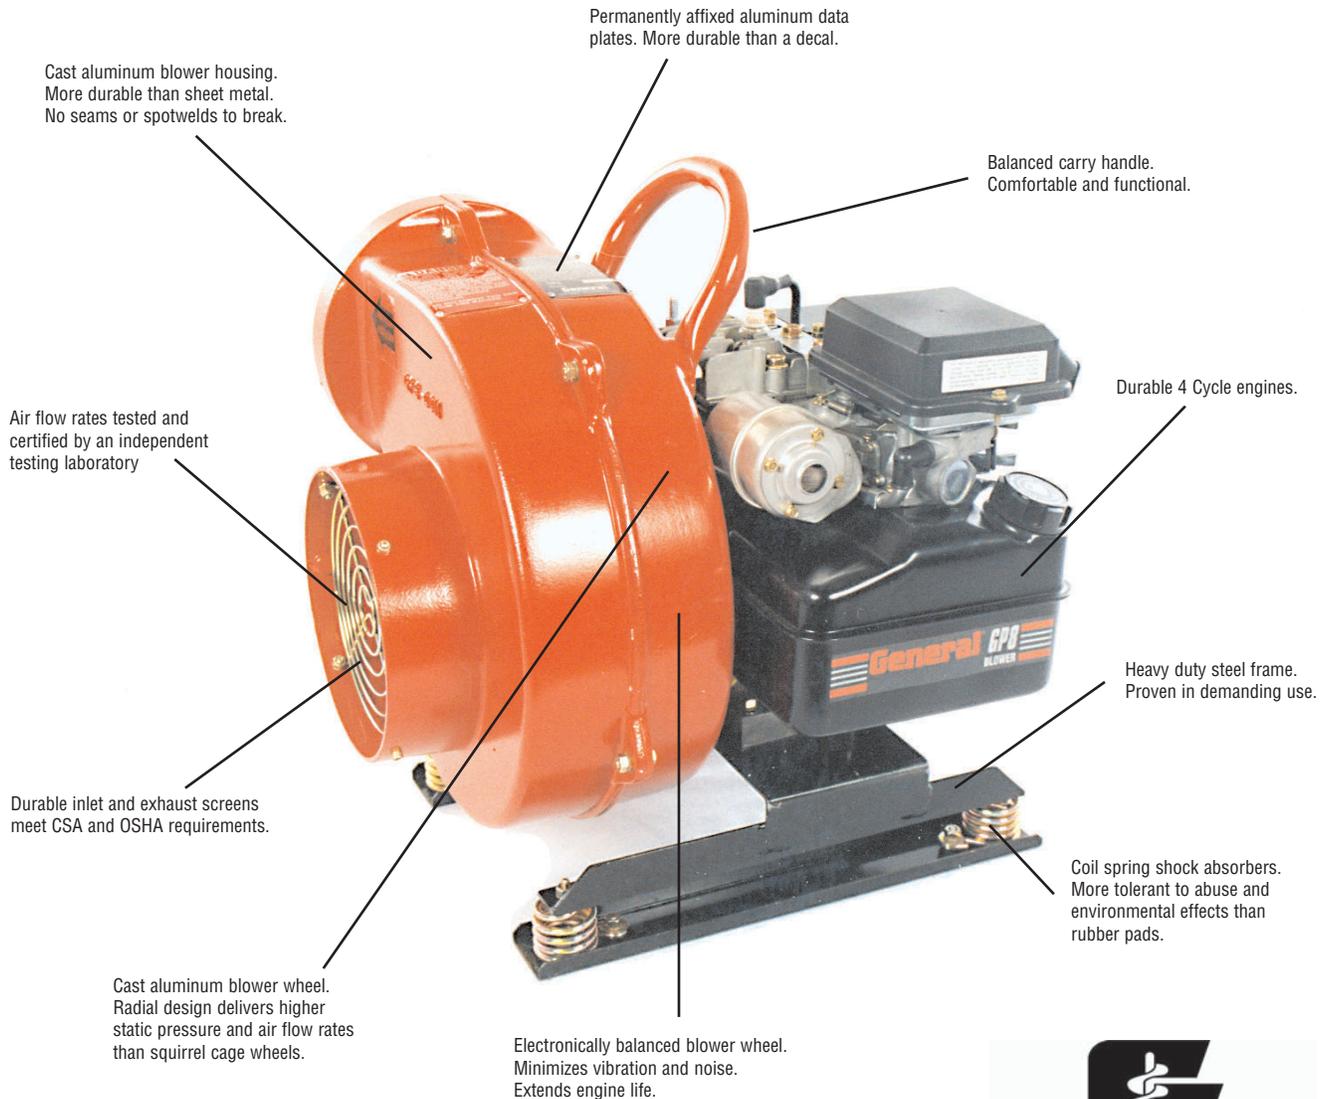

Specifications subject to change without notice or obligation.  
Names depicted are the registered trademarks of their respective owners



**General**  
EQUIPMENT COMPANY

620 Alexander Dr. S.W. • PO Box 334  
Owatonna, Minnesota 55060  
800.533.0524 • +507.451.5510  
Fax +507.451.5511  
Toll-Free Fax 877.344.4375 (Digger 5)  
Web: [www.generalequip.com](http://www.generalequip.com)  
E-mail: [general@generalequip.com](mailto:general@generalequip.com)  
Can you really afford anything less?