

JLG® TRIPLE-L® TRAILERS



JLG[®]
reachingout™

JLG® Triple-L® Trailers
FLATBED




POWER DECK ADVANTAGE

- No driving or lifting payload up/down inclines.
- No cumbersome ramp adjustments.
- Efficient one-person operation.
- Can be loaded or unloaded while detached from a tow vehicle.
- Can accommodate multiple items.
- No winches required.
- Raises and lowers in 15 seconds.

**INCREASE PRODUCTIVITY
WITH EFFICIENT, SAFER LOADING**

Load equipment and supplies faster and safer with the TRIPLE-L® trailer from JLG®. Unlike ramp and tilt-bed systems, the TRIPLE-L trailer features the exclusive Power Deck system, a unique hydraulic mechanism used to lower the entire deck of the trailer to ground level. This eliminates the need to drive, pull, winch or push a payload up or down a loading ramp, which increases productivity and improves safety. The result is a more efficient solution for loading construction and industrial equipment, machines and supplies.

Even hard-to-load equipment becomes a one-person job with a TRIPLE-L flatbed trailer. These models are ideal for carrying equipment with low ground clearance or poor traction such as scissor lifts, industrial sweepers, landscaping equipment, pavers, rollers, compactors and more. With nine models to choose from and capacities up to 10,000 pounds—you'll always find the right solution with a TRIPLE-L trailer.

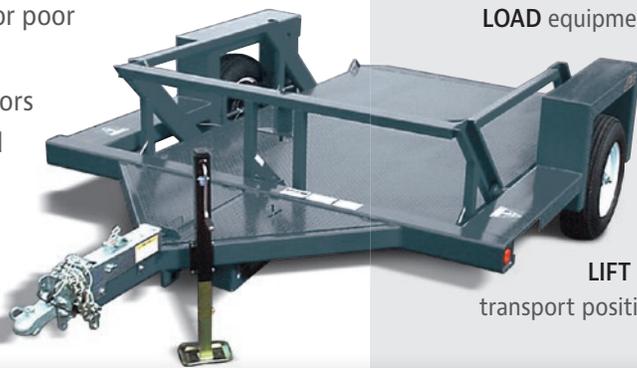

Single lever hydraulic control

LOWER entire deck to ground level.



LOAD equipment



LIFT to transport position



Large Deck

Up to 72 inches wide to hold more payload.



Quadra Spring Suspension

For smoother transport.



Low Angle Ramp

For low clearance loading.



Shielded Tail Lights

Added protection with improved visibility.



Storage Compartments


Protects components and tools; lockable.

CONVENIENT LOADING FOR EASE OF TRANSPORT

TRIPLE-L utility trailers load as quickly and easily as flatbed models, with the added convenience of enclosed sides. These dual-purpose models are ideal for carrying equipment or supplies. A full width, low angle ramp allows for easier loading with a handcart or dolly. Choose from eight models with capacities up to 10,000 pounds. Optional rails and a tailgate can be added or removed at any time for added convenience.

IMPROVED SAFETY

- Keeps all loading and unloading at ground level.
- Eliminates chances of dropping cargo off ramps.
- No climbing to access machine tie-downs.
- No heavy, hinged ramps that can come loose or drop.

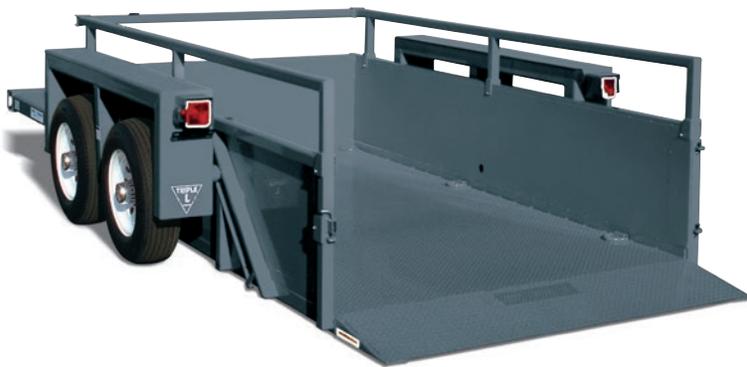

Fenderless

No protruding fenders that are susceptible to damage.



Unhitched Loading

Trailer can be loaded while hitched or freestanding.



Single Lever Control

12-volt hydraulic system is proportional in both directions.



Automatic Deck Latch

Deck automatically locks upon raising for added security.



Powder Coating

Provides durable protective finish.

JLG® Triple-L® Trailers SPECIFICATIONS

OPTIONS & ACCESSORIES



TRICKLE CHARGER
1.5-amp on-board charger with indicator lights.



EXTENDED SIDE RAILS
Bolted to existing rails for 36 in. or 48 in. heights.



SURGE BRAKES
Heavy-duty actuator with adjustable coupler.



SPARE TIRE & BRACKET
Mounts conveniently within the width of the chassis.



PINTLE HITCH
Interchanges and replaces standard ball coupler.



TAILGATE
Full width swinging tailgate can easily be removed.



WINCH
12-volt loading winch with 12-foot remote control.

Flatbed Model	248	449	4610	7610	7612	7614	7616	1012	1014
Capacity (lb)	2,200	5,000	4,500	7,000	7,000	7,000	6,500	10,000	10,000
Deck Width	4' 4"	4' 4"	6'	6'	6'	6'	6'	5' 10"	5' 10"
Deck Length	8'	9'	10'	10'	12'	14'	16'	12'	14'
Overall Length	14'	14'	15'	15'	17'	19'	21'	17'	19'
Trailer Weight (lb)*	1,510	1,670	2,070	2,500	2,690	2,930	3,150	3,010	3,210
Lift Mechanism	Winch	Hydraulic							
Axle	Single	Single	Single	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem
Wheel Size	15"	16"	14.5"	15"	15"	15"	15"	16"	16"
Brakes	Optional	Electric							
Hitch — Ball Size	2"	2-5/16"	2-5/16"	2-5/16"	2-5/16"	2-5/16"	2-5/16"	2-5/16"	2-5/16"

*Will vary slightly with optional equipment.

Utility Model	UT28	UT49	UT410	UT610	UT612	UT614	UT912	UT914
Capacity (lb)	2,200	4,500	4,500	7,000	7,000	6,500	10,000	10,000
Deck Width	4' 4"	4' 4"	6'	6'	6'	6'	5' 10"	5' 10"
Deck Length	8'	9'	10'	10'	12'	14'	12'	14'
Overall Length	14'	14'	15'	15'	17'	19'	17'	19'
Trailer Weight (lb)*	1,590	1,795	2,220	2,650	2,850	3,050	3,170	3,370
Lift Mechanism	Winch	Hydraulic						
Axle	Single	Single	Single	Tandem	Tandem	Tandem	Tandem	Tandem
Wheel Size	15"	16"	14.5"	15"	15"	15"	16"	16"
Brakes	Optional	Electric						
Hitch — Ball Size	2"	2-5/16"	2-5/16"	2-5/16"	2-5/16"	2-5/16"	2-5/16"	2-5/16"

*Will vary slightly with optional equipment.

JLG Industries, Inc.

1 JLG Drive
McConnellsburg, PA 17233-9533
Telephone 717-485-5161
Toll-free in US 877-JLG-LIFT
Fax 717-485-6417
www.jlg.com

An Oshkosh Corporation Company

Form No.: B-TRAILER-0714
Part No.: 3132302
R071004
Printed in USA



An Oshkosh Corporation Company